

RF & microwave solutions

RF and microwave components are specifically engineered to handle and transmit radio frequency (RF) and microwave signals with minimal loss and distortion. They enable the seamless integration of various devices, such as amplifiers, filters, antennas, and transmitters, ensuring efficient signal transmission and reception. With the ever-increasing demand for faster and more reliable wireless communication, RF and microwave component and connector solutions have become vital in telecommunications, aerospace, defense, and other industries, enabling the development of advanced wireless networks, satellite systems, and electronic devices.

manufacturers



low-loss coax cables

A1 Microwave

waveguide solutions

mac technologies
ceramic filters

AmpliVisionS
power amplifiers

MtronPTI

frequency solutions, RF filters,
power amplifiers

menlomicro
Wei Bo Associates HK, Ltd.

RF switches/limiters



circulators and isolators




transistors



crystals & oscillators

Konnect RF Rosenberg

RF connector, cable, harness &
modular component solutions

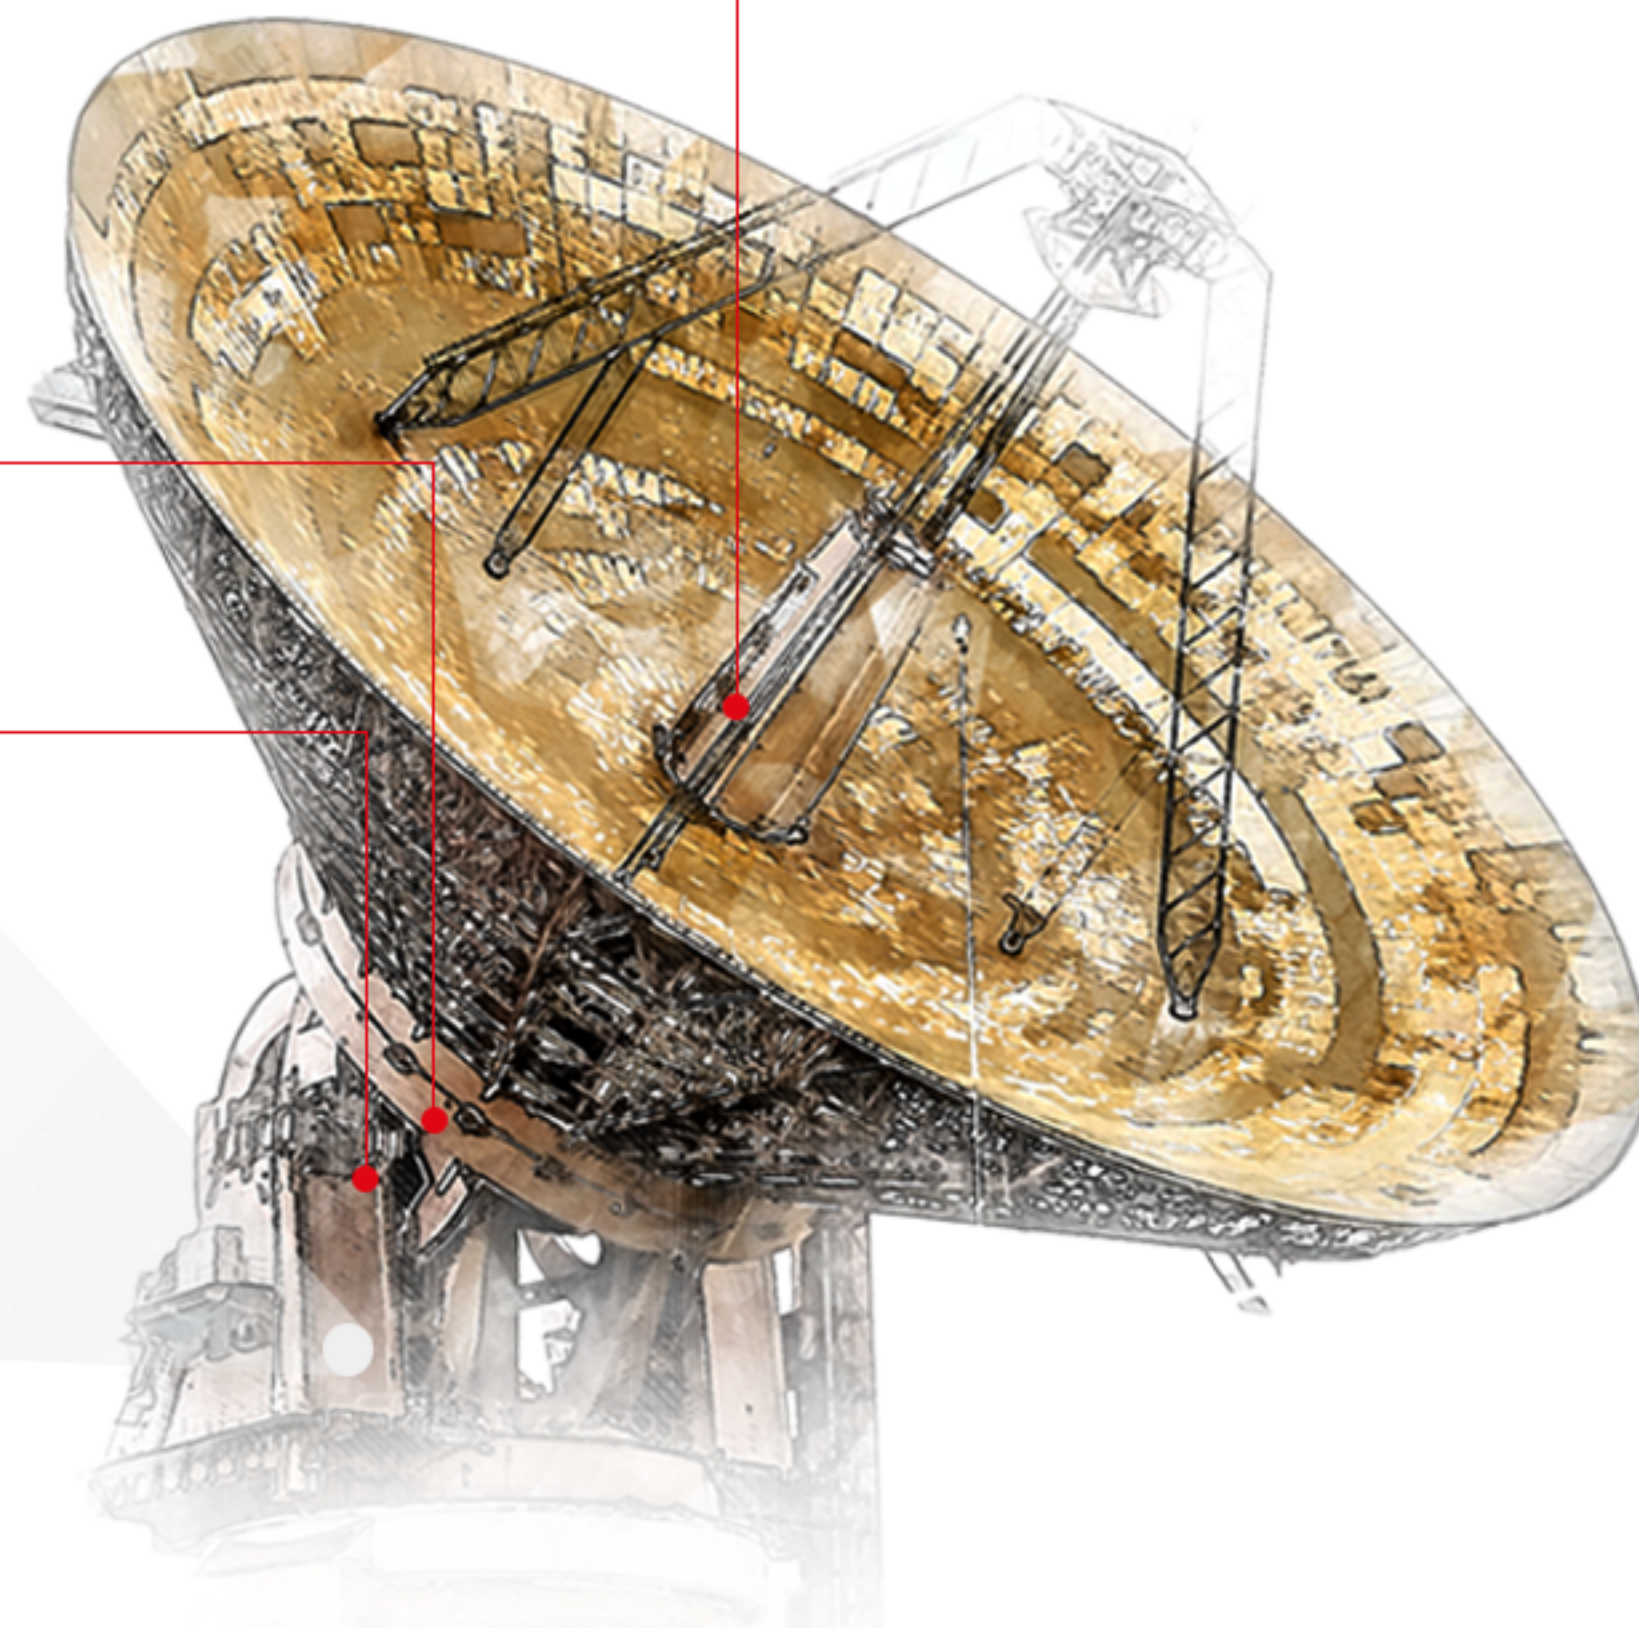

EUROQUARTZ

www.euroquartz.co.uk

COMPANY OVERVIEW

For over 50 years, we have supported military programs with state-of-the-art crystal resonators and oscillators. We offer a complete portfolio of frequency control products manufactured and tested to military standards: oscillators to MIL-PRF-55310 Product Level B and crystals to MIL-PRF-3098. Our dedicated servicing of the demanding requirements of the military market makes us a preferred supplier to most major defense contractors.

● Low Current Applications Standard

CLOCKS	
Standard Clock Oscillator – Ultra Low Current	
Frequency Range	156kHz – 160MH
Supply Voltage	1V /2.5V and 3.3V
Current Consumption	1.1mA – 5.0mA
Package Sizes	7x5 mm
XOA Series - Real time clock and precision timing	
Current Consumption	32µA - 36µA
Frequencies	27.3kHz – 100kHz
Package Sizes	3.2x2 /5x3.2mm/7x5mm
XOK Series - Standard Clock Oscillator – Ultra Low Current	
Current Consumption	1.1mA – 5mA
Frequencies	156kHz – 160MHz
Package Sizes	5x3.2mm/7x5mm
TCXO - EME32T - Real time clock, GPS and Smart metering	
Current Consumption	1.5µA
Frequencies	32.768kHz
Package Sizes	3.2x2.5mm

● Differential Outputs

LVPECL VCXO'S	
GPQF Series - Differential LVPECL Output VCXO	
Frequency Range	10 – 1500MHz
Pulling Range	±90ppm min
Current consumption	16mA Typical
Package Sizes	7x5mm
GPQN Series - Differential LVPECL Output VCXO	
Frequency Range	8 – 165MHz
Supply Voltage	10mA - 44mA (Typical)
Current Consumption	-1% Ctre ±0.5%
Package Sizes	Package Sizes 7x5mm and 5x3.2mm

● Low EMI Applications Standard

SPREAD SPECTRUM	
HM R Group - Reduces Electromagnetic Interference	
Frequency Range	3.5 – 165MHz
Spread Down	-0.5% Ctre-±0.25
Current consumption	10mA - 35mA (Typical)
Package Sizes	7x5mm and 5x3.2mm
HM Y Group - Reduces Electromagnetic Interference	
Frequency Range	8 – 165MHz
Supply Voltage	10mA - 44mA (Typical)
Current Consumption	-1% Ctre ±0.5%
Package Sizes	Package Sizes 7x5mm and 5x3.2mm

HM P Group - Reduces Electromagnetic Interference

Frequency Range	8 – 165MHz
Supply Voltage	10mA - 44mA (Typical)
Current Consumption	-1% Ctre ±0.5%
Package Sizes	7x5mm and 5x3.2mm

HM B Group - Reduces Electromagnetic Interference

Frequency Range	3.0 – 200MHz
Supply Voltage	-1.0% Ctre ±3.0%
Current Consumption	10 -25mA Typical
Package Sizes	7x5mm and 5x3.2mm

● Differential Outputs

LVDS VCXO	
Differential LVDS VCXO	
Frequency Range	10.0 – 1450MHz
Integrated Jitter	0.2nS Typical
Current consumption	25mA Typical
Package Sizes	7x5 , 5x3.2 and 3.2x2.5
Differential LVDS VCXO	
Frequency Range	10.0 – 1450MHz
Pulling Range	100ppm Min
Current consumption	16mA Typical
Package Sizes	7x5, 5x3.2 and 3.2x2.5

● Voltage Controlled

VCXO SERIES	
G Series - Voltage Controlled Oscillator CMOS Output	
Frequency Range	1.0 – 50.0MHz
Pulling Range	±80ppm Min
Phase Jitter	1.0pS Max
Package Sizes	7x5/ 5x3.2/3x2.2 mm
GTQF Series - Voltage Controlled Oscillator CMOS Output	
Frequency Range	10 – 245.0MHz
Pulling Range	±90ppm Min
Phase Jitter	0.9pS Typical
Package Sizes	7x5and 5x3.2mm
GTQN Series - Voltage Controlled Oscillator CMOS Output	
Frequency Range	10 – 245.0MHz
Pulling Range	±90ppm Min
Phase Jitter	0.6pS Typical
Package Sizes	7x5and 5x3.2mm
GPQN Series - Voltage Controlled Oscillator – PECL Output	
Frequency Range	10MHz – 1450.0MHz
Pulling Range	±90 - 200ppm
Phase Jitter	0.6pS Typical
Package Sizes	7x5 and 5x3.2mm

HDQF Series - Differential LVDS Output Waveform	
Frequency Range	10 – 1450MHz
Integrated Jitter	0.9pS Typical
Current consumption	16mA Typical
Package Sizes	7x5, 5x3.2

GDQF Series - Voltage Controlled Oscillator – LVDS Output	
Frequency Range	10MHz – 1450.0MHz
Pulling Range	±100ppm
Phase Jitter	1.2 pS Typical
Package Sizes	7x5 and 5x3.2mm

GDQN Series - Voltage Controlled Oscillator – LVDS Output	
Frequency Range	10MHz – 1450.0MHz
Pulling Range	±100ppm
Phase Jitter	0.6pS Typical
Package Sizes	7x5 and 5x3.2mm

● Differential Outputs

LVDS CLOCKS	
HDK Series - Differential LVDS Output Waveform	
Frequency Range	10 – 220MHz
Integrated Jitter	0.2pS Typical
Current consumption	16mA Typical
Package Sizes	7x5 , 5x3.2 and 3.2x2.5

● Military & Aerospace

1000BM Series - 14 pin DIL Clock CMOS	
Frequency Range	10MHz – 40MHz
Input Voltage	3.3V/5V
Stability	±50ppm
Current Consumption	10 ~ 70 mA

75000 BM Series - 7x5mm smd Clock CMOS	
Frequency Range	1MHz – 60MHz
Input Voltage	1.8V ~ 5V
Stability	±50 ~ ±100ppm
Current Consumption	7mA max (15pF)

STXO Series - 3.2x2.5mm High Shock smd Clock	
Frequency Range	10MHz – 80MHz
Input Voltage	3.3V/5V
Current Consumption	3mA max
Phase Noise	-163 dBc/Hz

CXOLHG Series - 3.2x2.5mm High Shock smd Clock	
Frequency Range	10MHz – 80MHz
Input Voltage	2.5V/3V/3.3V
Current Consumption	3mA max
Phase Noise	-163 dBc/Hz

T1307 Series - TCXO Ultra-low vibration sensitivity	
Frequency Range	10MHz – 50MHz
Input Voltage	3.3V,5V or 12V
Current Consumption	6mA max
Phase Noise	-157dBc/Hz
YH1300 Series - OCXO Ultra-low vibration sensitivity	
Frequency Range	10MHz – 50MHz
Input Voltage	3.3V/5V
Low g snsitivity	5x10-11/g
Phase Noise	-165dBc/Hz

● Differential Outputs

LVDS CLOCKS	
HDQN Series - Differential LVDS Output Waveform	
Frequency Range	10 – 1450MHz
Integrated Jitter	0.6pS Typical
Current consumption	15mA – 31mA
Package Sizes	7x5 , 5x3.2

HCK Series - Non-PLL Differential LVDS Output Waveform	
Frequency Range	13.50 – 220MHz
Integrated Jitter	0.2pS Typical
Current consumption	25mA Typical
Package Sizes	7x5, 5x3.2 and 3.2x2.5



STATEK
















www.statek.com

COMPANY OVERVIEW

For over 50 years, we have supported military programs with state-of-the-art crystal resonators and oscillators. We offer a complete portfolio of frequency control products manufactured and tested to military standards: oscillators to MIL-PRF-55310 Product Level B and crystals to MIL-PRF-3098. Our dedicated servicing of the demanding requirements of the military market makes us a preferred supplier to most major defense contractors.

- **Military Product Features**
 - Extreme high shock survivability (highest in the industry)
 - Ultra-miniature and low-profile packaging
 - Excellent long-term aging
 - Full product traceability
 - Extended temperature ranges (-55°C to 225°C)

- **Surface Mount Quartz Crystals Key Features:**
 - Ultra-Miniature
 - Frequencies from 10 kHz to 250 MHz
 - Highest Shock Survivability in the Industry
 - Tight Frequency Stability
 - Low Acceleration Sensitivity
 - High Reliability
 - Excellent Long-Term Aging


PRODUCT	PACKAGE(MM)	FREQUENCY RANGE	
CX20	2.5 x 1.2	16 kHz to 32.768 kHz	
CX18	1.6 x 1.0	30 MHz to 100 MHz	
CX17	4.8 x 3.0	12 MHz to 200 MHz	
CX16	2.0 x 1.2	24 MHz to 100 MHz	
		32 kHz to 180 kHz	
CX11	3.2 x 1.5	32 kHz to 240 kHz	
		16 MHz to 250 MHz	
CX11L	3.2 x 1.5	16 MHz to 250 MHz	
		(Telemetry Crystal)	
CX11LHG High Shock	3.2 x 1.5	16 MHz to 50 MHz	
CX9HT High Temperature	4.1 x 1.5	32 kHz to 160 kHz	
		14 MHz to 250 MHz	
CX4	5.0 x 1.8	30 kHz to 250 kHz	
		600 kHz to 1.4 MHz	
		14 MHz to 250 MHz	
CX4HG High Shock	5.0 x 1.8	14 MHz to 50 MHz	
CX4HT High Temperature	5.0 x 1.8	30 kHz to 250 kHz	
		600 kHz to 2.5 MHz	
		14 MHz to 250 MHz	
CX1	8.0 x 3.6	10 kHz to 600 kHz	
		530 kHz to 2.1 MHz	
		6 MHz to 250 MHz	
CX41HG High Shock	8.0 x 3.6	6 MHz to 250 MHz	
CX1HT High Shock	8.0 x 3.6	6 MHz to 250 MHz	
SWCX1 Sweep Quartz	8.0 x 3.6	6 MHz to 250 MHz	

MAC TECHNOLOGIES


www.mactech.co.kr

COMPANY OVERVIEW


MAC technologies is a company that develops and produces varied selections of wireless communication components essential in this ever changing high tech era, based on its source technology.



- ▶ Low insertion loss for using high Q-value dielectric resonators
- ▶ Small and light for using high dielectric constant ceramics
- ▶ Excellent temperature stability for temperature
- ▶ Excellent mechanical stability without vibratile structure
- ▶ SMD and reflow soldering available
- ▶ Mountable by automatic placement machine

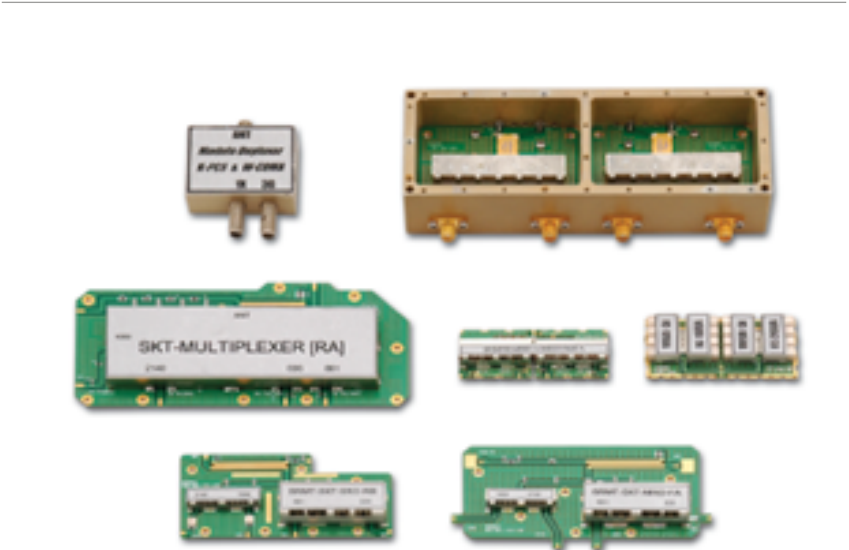


- ▶ Various size & wide frequency
- ▶ Temperture compensated
- ▶ Low insertion loss
- ▶ Low cost & custom design
- ▶ High mechanical stability



- ▶ Low insertion loss for using high Q-value dielectric resonators
- ▶ Small and light for using high dielectric constant ceramics
- ▶ Excellent temperature stability for temperature
- ▶ Excellent mechanical stability without vibratile structure
- ▶ SMD and reflow soldering available
- ▶ Mountable by automatic placement machine

- **QUADRIFILAR WIDE-BAND ANTENNA**
 - Wide-band responsibility
 - Lighter than Ceramic Antennas
 - Circular Polarization Antenna
 - Provide highly stabilized performance
 - Better multi recognition performance
 - 900 MHz ISM Band (FCC, ETSI, KCC, CCC & etc.)

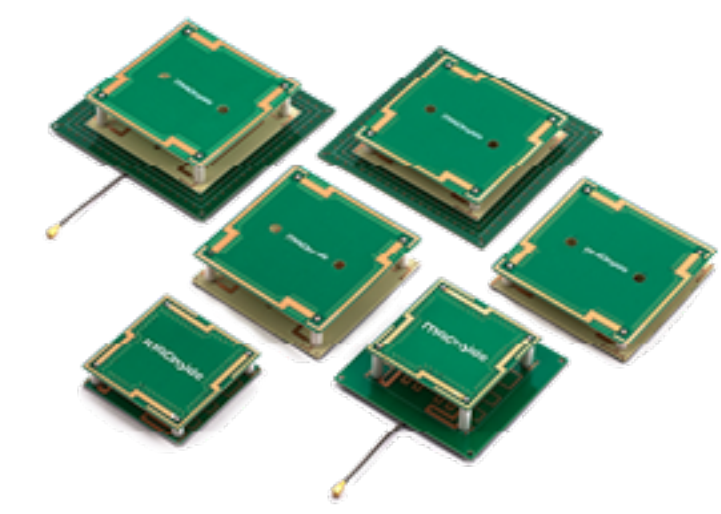


QUADRIFILAR WIDE-BAND ANTENNA GAIN TABLE										
No.	Part No.	Antenna Weight (g)	Dimension (mm²)	Frequency range(MHz)	Measurement Data (MAC technologies Chamber)					
					BandW (-10dB)(MHz)	BeamW (-3dB)(Deg	Hor(dBiL)	Ver(dBiL)	RHCP(dBic) AR(dB)	AR(dB
1	MQWA45SH915-A	8	45x45x10	FCC ETSI KCC CCC & etc.	200 Typ.	110	-1.63	-0.66	27760	3.0 min
2	MQWA45SM915-A	9	45x45x15		200 Typ.	110	-0.51	0.65	34366	3.0 min
3	MQWA45SP915-A	19	45x45x18		200 Typ.	110	-0.40	0.75	45080	3.0 min
4	MQWA60F45SH915-A	11	60×60×10(F45×45)		200 Typ.	110	-1.25	-1.06	29221	3.0 min
5	MQWA60F45SM915-A	12	60×60×15(F45×45)		200 Typ.	110	-0.08	0.21	3.00	3.0 min
6	MQWA60F45SP915-A	12	60×60×18(F45×45)		200 Typ.	110	-0.16	0.95	11383	3.0 min
7	MQWA60SH915-A	13	60×60×10		200 Typ.	100	0.33	0.10	45202	3.0 min
8	MQWA60SM915-A	14	60x60x15		200 Typ.	100	0.71	0.56	18323	3.0 min
9	MQWA79SH915-A	18	79×79×10(F60×60)		200 Typ.	100	0.32	0.06	43891	3.0 min
10	MQWA79SM915-A	19	79×79×15(F60×60)		200 Typ.	100	1.Eki	0.86	34029	3.0 min

QUADRIFILAR WIDE-BAND RECOGNITION DISTANCE

No.	Part No.	Dimension (mm²)	Card Tag (m)				Alien Tag (m)			
			Tag(H)	Tag(V)	Best(H)	Best(V)	Tag(H)	Tag(V)	Best(H)	Best(V)
1	MQWA45SH915-A	45x45x10	2.1	3.1	2.8	4.0	2.0	3.6	2.7	4.5
2	MQWA45SM915-A	45x45x15	3.0	4.0	3.0	4.4	2.1	4.4	3.0	6.6
3	MQMA45SP915-A	45x45x18	3.1	4.2	4.3	4.5	3.1	4.4	4.5	6.3
4	MQWA60F45SH915-A	60×60×10(F45×45)	3.1	3.4	4.0	4.2	3.2	4.0	4.8	4.6
5	MQWA60F45SM915-A	60×60×15(F45×45)	3.2	3.6	4.8	4.3	3.3	4.3	5.3	1.7
6	MQMA60F45SP915-A	60×60×18(F45×45)	3.2	4.4	4.6	6.3	3.3	4.6	5.2	6.7
7	MQWA60SH915-A	60x60x10	3.3	4.0	4.9	5.5	3.4	4.3	5.4	6.0
8	MQWA60SM915-A	60x60x15	3.4	4.2	5.3	5.8	4.8	4.4	6.3	6.6
9	MQWA79SH915-A	79×79×10(F60×60)	3.3	3.9	4.8	5.5	3.3	4.3	5.3	6.0
10	MQWA79SM915-A	79×79×15(F60×60)	3.4	4.2	5.8	5.8	4.8	4.4	6.8	6.7

CERAMIC ANTENNA

- Circular Polarization Antenna
- 900 MHz ISM Band (FCC, ETSI, KCC, CCC & etc.)
- Antenna dimension is as small as Teflon antenna
- Using high quality factor dielectric
- Better multi recognition performance
- Provide highly stabilized performance

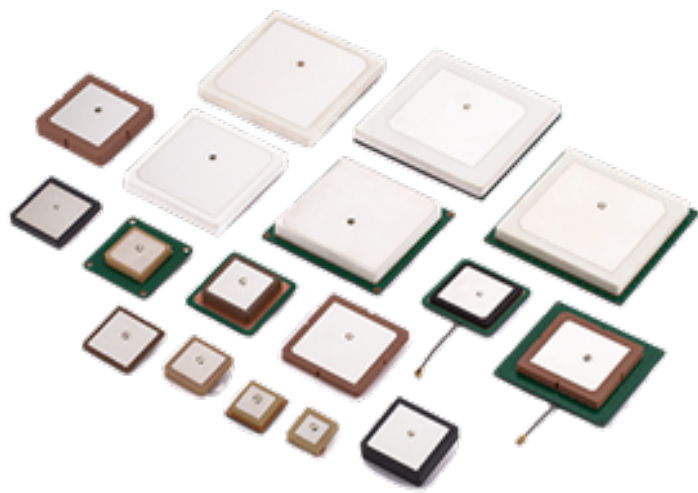

CERAMIC ANTENNA GAIN TABLE

No.	Part No.	Ground Plane (mm)	Antenna Weight (g)	Dimension (mm²)	Frequency range(MHz)	Measurement Data (MAC technologies Chamber)					
						BandW	BeamW	Hor(dBiL)	Ver(dBiL)	RHCP(dBic) AR(dB)	AR(dB)
						10dB (MHz)	(-3dB)(Deg				
1	MPAC18SA915P-TA	50x50	3	18.3x18.3x2	FCC ETSI KCC CCC & etc.	4 Typ.	125	-12.42	-12.01	-10.50	3.0 min
2	MPAC18SC915P-TA	50x50	7	18.3x18.3x4		5 Typ.	125	-9.81	-11.50	-8.77	3.0 min
3	MPAC24SA915P-TA	50x50	6	24.4x24.4x2		4 Typ.	120	-9.54	-8.85	-6.04	3.0 min
4	MPAC24SC915P-TA	50x50	12	24.4x24.4x4		5 Typ.	120	-6.00	-5.67	-2.77	3.0 min
5	MPAC34SA915P-TA	50x50	11	34x34x2		3 Typ.	120	-5.54	-4.46	-1.98	3.0 min
6	MPAC34SC915P-TA	50x50	21	34x34x4		4 Typ.	120	-1.47	-2.16	1.Kas	3.0 min
7	MPAC34SF915P-TA	50x50	37	34x34x7		5 Typ.	120	-0.70	-1.67	Oca.80	3.0 min

CERAMIC ANTENNA RECOGNITION DISTANCE

No.	Part No.	Ground Plane (mm)	Antenna Weight (g) Dimension (mm²)	Card Tag (m)				Alien Tag (m)			
				Tag(H)	Tag(V)	Best(H)	Best(V)	Tag(H)	Tag(V)	Best(H)	Best(V)
1	MPAC18SA915P-TA	50x50	18.3x18.3x2	0.4	0.7	0.7	1.0	0.3	0.5	0.5	0.6
2	MPAC18SC915P-TA	50x50	18.3x18.3x4	0.6	0.9	0.9	1.2	0.5	0.6	0.7	0.8
3	MPAC24SA915P-TA	50x50	24.4x24.4x2	0.7	0.9	0.8	1.1	0.6	0.8	0.7	1.0
4	MPAC24SC915P-TA	50x50	24.4x24.4x4	1.1	1.3	1.4	1.6	0.8	1.0	1.1	1.4
5	MPAC34SA915P-TA	50x50	34x34x2	1.2	1.6	1.6	2.2	0.9	1.2	1.3	1.7
6	MPAC34SC915P-TA	50x50	34x34x4	1.2	1.6	1.6	2.2	0.9	1.2	1.3	1.7
7	MPAC34SF915P-TA	50x50	34x34x7	1.5	1.9	2.1	2.8	1.2	1.6	1.4	2.0
8	MPAC45SC915P-TA	78x78	45x45x4	1.7	2.2	4.1	4.4	1.6	2.2	4.1	4.4
9	MPAC45SF915P-TA	78x78	45x45x7	2.0	3.1	4.8	5.4	1.9	3.0	4.8	5.4
10	MPAC62SF915P-TA	78x78	61.5x61.5x7	2.4	3.4	5.7	6.0	2.4	3.4	5.7	6.0
11	MPAC79SE915P-TA	78x78	78.7x78.7x6.35	2.9	3.8	6.0	7.0	2.9	3.9	6.2	7.5



MTRON

www.mtronpti.com



REFERENCES

Northrop Grumman Corporation
General Dynamics Corporation
Lockheed Martin Corporation
L3Harris Technologies Inc.
Collins Aerospace
MDA Corporation
NEC Corporation
Boeing Co
ISRO

COMPANY OVERVIEW

MtronPTI has over 70 design wins on satellite platforms and manned spacecraft. From Engineering Design Units to Flight hardware, MtronPTI has a proven team and track record to meet your demanding space needs.

Supporting military, commercial, and scientific space applications, MtronPTI delivers qualified solutions which fully meet the reliability and performance demands of space.

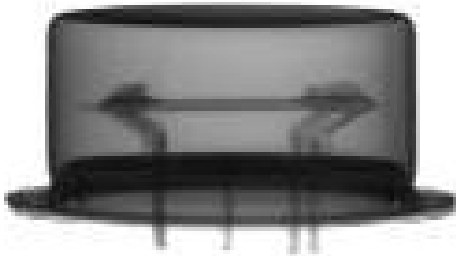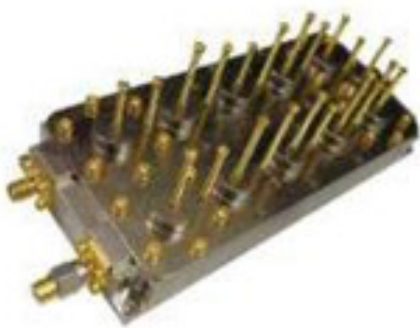

CAPABILITIES

- ▶ In House Crystal Resonator Processing
- ▶ Ultra-Lightweight and Compact Solutions
- ▶ Corona Discharge Analysis / Testing
- ▶ High Power Handling
- ▶ High Channel to Channel Isolation
- ▶ Very Low Insertion Loss

PRODUCT LINES

- ▶ Crystal Filters to 200 MHz
- ▶ LC Filters to 6 GHz
- ▶ Cavity / Waveguide Filters to 20 GHz
- ▶ N-plexers
- ▶ Precision Resonators to 200 MHz

SPACE LEVEL IN HOUSE TESTING

- ▶ Thermal Shock per MIL-STD-202, Method 107
- ▶ Terminal Strength per MIL-STD-202, Method 211
- ▶ Mechanical Shock per MIL-STD-202, Method 213
- ▶ Gross Leak Testing per MIL-STD-202, Method 112
- ▶ Random Vibration per MIL-STD-202, Method 214A
- ▶ Fine Leak Testing - Helium per MIL-STD-202, Method 112
- ▶ Sinusoidal Vibration per MIL-STD-202, Method 201 and 204
- ▶ PIND (Particle Impact Noise Detection) per MIL-STD-202, Method 217
- ▶ Other Miscellaneous Testing including: Life, Immersion, Barometric Pressure, Humidity, Solderability
- ▶ Dielectric withstanding voltage, Insulation Resistance

WORKMANSHIP STANDARTS

- ▶ In-House J-STD-001 Certified Trainer
- ▶ J-STD-001 Class 3 with Space
- ▶ Addendum

PRODUCTION CAPABILITIES

- ▶ Dedicated Clean Room
- ▶ World-class FOD Control
- ▶ In House Crystal Processing
- ▶ Internal Quartz Sweeping
- ▶ Laser Weld

FULL DC and RF TESTING

- ▶ Crystal Filters to 200 MHz
- ▶ LC Filters to 6 GHz
- ▶ Cavity / Waveguide Filters to 20 GHz
- ▶ N-plexers
- ▶ Precision Resonators to 200 MHz

AMPLIVISIONS

www.amplivisions.com

COMPANY OVERVIEW

AmpliVisionS is a high-new technology enterprise. AmpliVisionS design, develop and manufacture RF&Microwave products for commercial, defence and industrial systems.

The main Product line includes Broadband Power Amplifier module, Pulsed Power Amplifier module, Rack-mount Amplifier subsystem. According to requests of customer, AmpliVisionS develops wide range of RF&Microwave products from 1.5MHz to 60GHz.



AMPLIFIER MODULES UP TO 6 GHz

Model No.	Start (MHz)	Stop (MHz)	Pout (Watt)	Power Gain (dB)	Size (mm)
AVBR00205H53	20	520	200	53	180*120*25
AVBR00210H49	20	1000	80	50	150*90*25
AVBR00810H49	80	1000	80	50	150*90*25
AVBR0727H47	700	2700	50	48	162x86x25
AVBR0727H50	700	2700	100	50	180x140x25
AVBR0830H47	800	3000	50	48	162x86x25
AVBR1060H47	1000	6000	50	47	170*165*25
AVBR1060H50	1000	6000	100	50	240*240*25
AVBR2060H45	2000	6000	30	45	160*120*25
AVBR2060H47	2000	6000	50	47	170*165*25
AVBR2060H50	2000	6000	100	50	240*300*27
AVBR2560H47	2500	6000	50	48	140*120*23

AMPLIFIER MODULES & SUBSYSTEMS UP TO 18 GHz

Model No.	Start (GHz)	Stop (GHz)	Pout (Watt)	Power Gain (dB)	Size (mm)
AVBR20180H41	2	18	15	41	160*140*25
AVBR40190H40	4	19	10	40	160*140*25
AVBR60180H46	6	18	40	57	160*120*22
AVBR60180H50	6	18	100	50	340*340*40
AVBR60180U50	6	18	100	50	483 x 221 x 560 (5U)

AMPLIFIER MODULES UP TO 40 GHz

AVBR180270H37	18	26,5	5	37	160*120*27
AVBR180270H50	18	27	100	50	300x280x35
AVBR230300H35	23	30	3	35	160*120*27
AVBR260400H36	26,5	40	4	36	160*120*27
AVBR260400H37	26,5	40	5	37	160*120*27
AVBR270300H50	27	30	100	50	300x280x35

POLYFET RF DEVICES

www.polyfet.com

COMPANY OVERVIEW


Polyfet RF Devices is a manufacturer of broad band RF power transistors and power modules. They are a private corporation that has been in business since 1988. The devices consist of Gallium Nitride, LDMOS, and VDMOS technologies processed using state of the art Equipment.

LDMOS	FLANGED MOUNT									28 VOLT
Part No	Pout	Freq	Gain	theta	gm	Idsat	Ciss	Crss	Coss	Style
	W	Mhz	dB	jc	mho	A	pf	pf	pf	
LP701	35	500	12	1,8	1,6	10	60	1,6	30	Single Ended
LC401	60	500	12	1,3	2,7	17	80	4	50	Single Ended
LP702	70	500	12	1	3,2	20	120	3,2	60	Single Ended
LK701	70	500	14	1	1,6	10	60	1,6	30	Push - Pull
LK702	90	500	13	0,6	3,2	20	120	3,2	60	Push - Pull
LX501A	100	500	12	0,75	4,8	30	150	7,5	100	Single Ended
LZ402	125	500	12	0,75	5,4	34	160	8	100	Single Ended
LB2301	125	500	18	0,48	5	15	70	1,4	25	Push - Pull
LR2301	125	500	18	0,48	5	15	70	1,4	25	Push - Pull
LB401	130	500	14	0,75	2,7	17	80	4	50	Push - Pull
LR401	130	500	14	0,75	2,7	17	80	4	50	Push - Pull
LR501A	175	500	13	0,44	4,8	30	150	7,5	100	Push - Pull
LB501A	175	500	13	0,44	4,8	30	150	7,5	100	Push - Pull
LA2541	200	500	16	0,38	7,5	21	122	2	45	Push - Pull
LS2541	200	500	16	0,38	7,5	21	122	2	45	Push - Pull
LR2401	175	500	16	0,48	7	24	110	1,8	40	Push - Pull
LR2501	200	500	16	0,4	7,5	27	122	2,6	45	Push - Pull
LR2541	200	500	16	0,4	7,5	21	122	2	45	Push - Pull
LS2641	250	500	16	0,35	7,8	29	147	1,6	60	Push - Pull
LP801	15	1000	12	3,4	0,8	5,5	30	1	15	Single Ended
LQ2001	20	1000	19	1,5	1	2,8	17	0,3	6	Push - Pull
LQ801	30	1000	12	1,8	0,8	5,5	30	1	15	Push - Pull
LK802	45	1000	12	1,1	1,6	11	60	2	30	Push - Pull
LK2201	50	1000	17	1,2	2,8	7,5	40	0,8	15,2	Push - Pull
LX401	60	1000	10	1,3	2,7	17	80	4	50	Single Ended
LX2401	80	1000	15	0,75	7	24	110	1,8	40	Single Ended
LB2401	125	1000	16	0,48	7	24	110	1,8	40	Push - Pull
LP601	7	1500	10	3,6	0,5	4	16	0,8	13	Single Ended

GALLIUM NITRIDE TRANSISTORS										
GaN	FLANGED MOUNT									28 VOLT
Part No	Pout	Freq	Gain	theta	eff	Idsat	Ciss	Crss	Coss	Style
	W	Mhz	dB	jc	%	A	pf	pf	pf	
GP1001	10	2500	11	5,45	50	2,4	3	0,17	1,6	Single Ended
G21001	10	2500	11	5,45	50	2,4	3	0,17	1,6	Single Ended
GP2001	20	2000	11	4,2	65	7,2	7,2	0,56	4	Single Ended
G22001	20	2000	11	4,2	65	7,2	7,2	0,56	4	Single Ended
GX2001	20	2000	11	3,5	65	7,2	7,4	0,56	4,5	Single Ended
GX4001	35	2000	11	2,4	60	14,5	13	1,1	7,5	Single Ended
GX4002	70	2000	11	0,9	55	26	26	2,2	15	Single Ended

GaN	FLANGED MOUNT									28 VOLT
Part No	Pout	Freq	Gain	theta	eff	Idsat	Ciss	Crss	Coss	Style
	W	Mhz	dB	jc	%	A	pf	pf	pf	
GP1441	10	2500	11	5,45	35	2,2	3	0,15	1,5	Single Ended
G21441	10	2500	11	5,45	35	2,2	3	0,15	1,5	Single Ended
GP2441	40	2500	11	4,2	55	6,8	7,2	0,37	3,5	Single Ended
GP3441	50	2500	11	3,6	55	8,5	10	0,45	6	Single Ended
GX2441	50	2000	11	3,5	55	6,8	7,5	0,37	4	Single Ended
GX3441	80	2000	12	3	60	8,5	10	0,45	6	Single Ended
GX4441	100	2000	12	2,4	60	13,5	13	0,8	7	Single Ended
GX3442	120	2000	11	1,8	55	17	20	0,9	12	Single Ended
GX4442	160	2000	12	0,9	55	24	26	1,6	14	Single Ended

LDMOS	SURFACE MOUNT									28 VOLT
Part No	Pout	Freq	Gain	theta	gm	Idsat	Ciss	Crss	Coss	Style
	W	Mhz	dB	jc	mho	A	pf	pf	pf	
L8701PR	30	500	13	2,5	1,6	10	60	1,6	30	Single Ended
L2701	30	500	13	1,8	1,6	10	60	1,6	30	Single Ended
L2601	7	1500	10	3,6	0,5	4	16	0,8	13	Single Ended
L8801PR	13	1000	10	5	0,8	5,5	30	1	15	Single Ended
L2801	15	1000	12	3,4	0,8	5,5	30	1	15	Single Ended

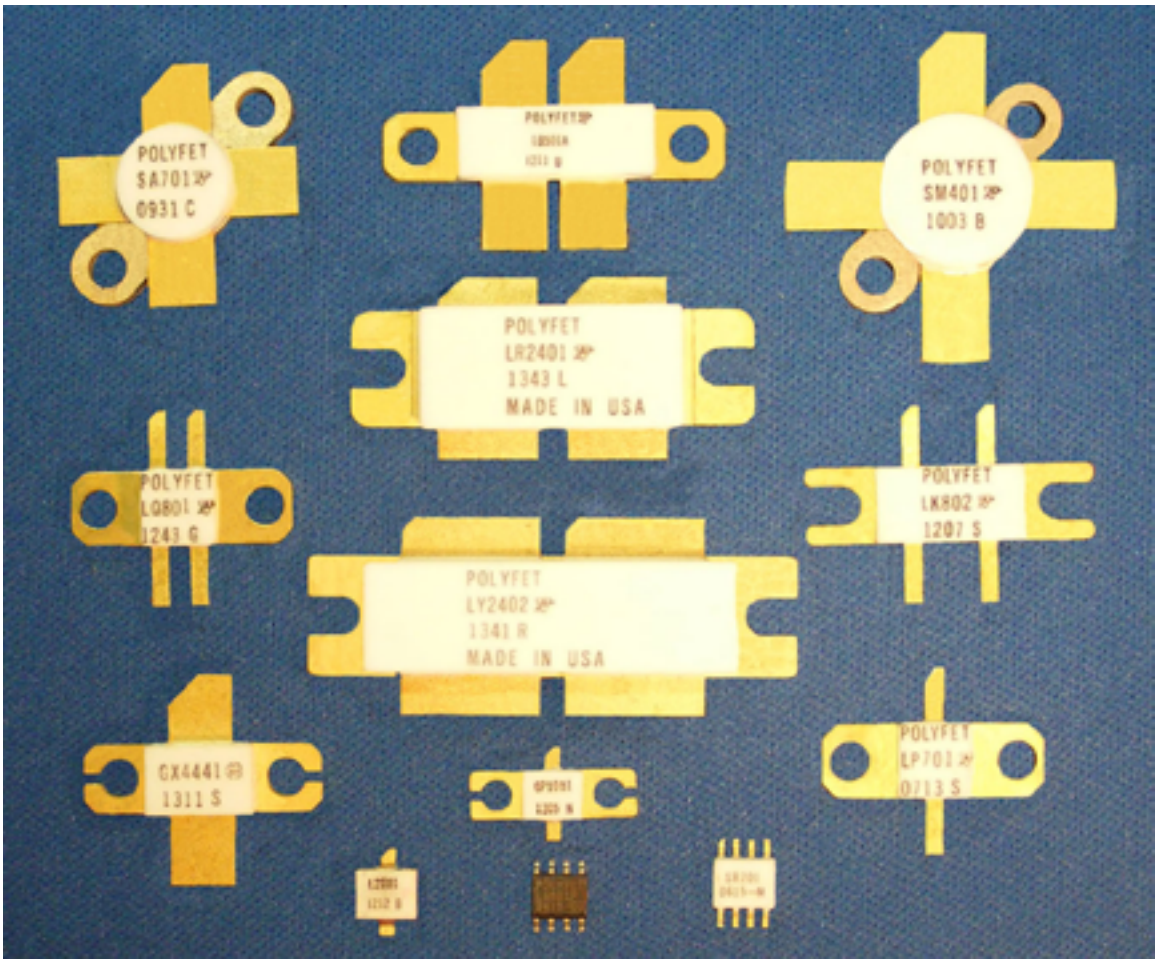






COMPANY OVERVIEW

RF Circulator Isolator, Inc. (RFCI) was incorporated in September 2012. RFCI acquired CIPL (Circulator/Isolator Product Line) business from RFMD, when RFMD decided to exit the CI business. Management, engineering team, support group, and oversea manufacturing were transferred intact to RFCI.






Product Features

- Broad selection of frequency and Bandwidth (48MHz to 20GHz, narrow to 100% Bandwidth)
- High Reliability performance
- High Peak and CW Power Handling capability
- Wide Operation Temperature Range
- Communication Base Station Bands with excellent IMD performance
- Broadband width, Octave and Octave-plus Bandwidth
- Robust Construction
- Standards and Miniature package size
- Magnetically Shield
- RoHS Compliant
- No beryllium Oxide
- Clockwise (CW) and Counter-Clockwise rotation (CCW)
- Reflected power from 1 Watt to 200 Watts pending on Model Number (contact factory) for your particular requirement


DROP-IN CIRCULATORS / ISOLATORS

				
Single Drop-in Circulator, Communication Bands from 300MHz to 18 GHz	Single Drop-in Isolator (5W to 200W Power Handling) from 300MHz to 10 GHz	Dual Drop-in Isolator (5W to 150W Power Handling) from 300MHz to 10 GHz	Drop-in Iso-Attenuator (100W with 20dB, 30dB) from 700MHz to 4 GHz	Broadband, Octave Band Circulator/ Isolator from 500MHz to 20 GHz

COAXIAL CIRCULATORS /ISOLATORS

				
Type N Circulator from 300MHz to 10 GHz	Type N Dual Circulator from 300MHz to 10 GHz	Type N Single and Dual Isolator (10W to 250W Power Handling) from 300MHz to 10 GHz	SMA Circulator from 300MHz to 20 GHz	SMA Single and Dual Isolator (10W to 200W Power Handling) from 300MHz to 20 GHz



SMD CIRCULATORS/ ISOLATORS

	
SMD Circulator from 700MHz to 3800 MHz	SMD Isolator (10 W to 100W Power Handling) from 700MHz to 3800 MHz


SMD CIRCULATORS/ ISOLATORS

	
Coaxial Type N, SMA Circulator/Isolator (50W to 100W Power Handling) from 49MHz to 174 MHz	Drop-in Circulator/ Isolator (50W to 100W Power Handling) from 49MHz to 174 MHz

DROP-IN FLANGE MOUNT DEVICE

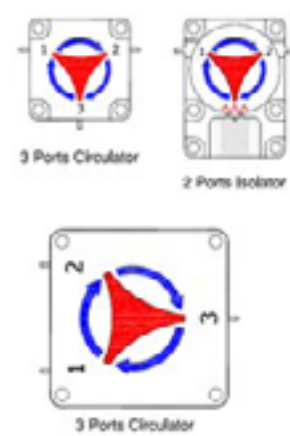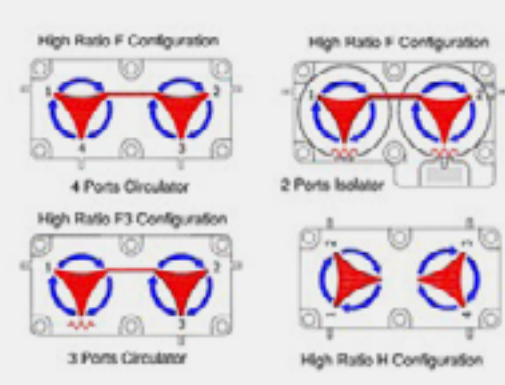Single Junction	Dual Junction
	

COAXIAL DEVICE

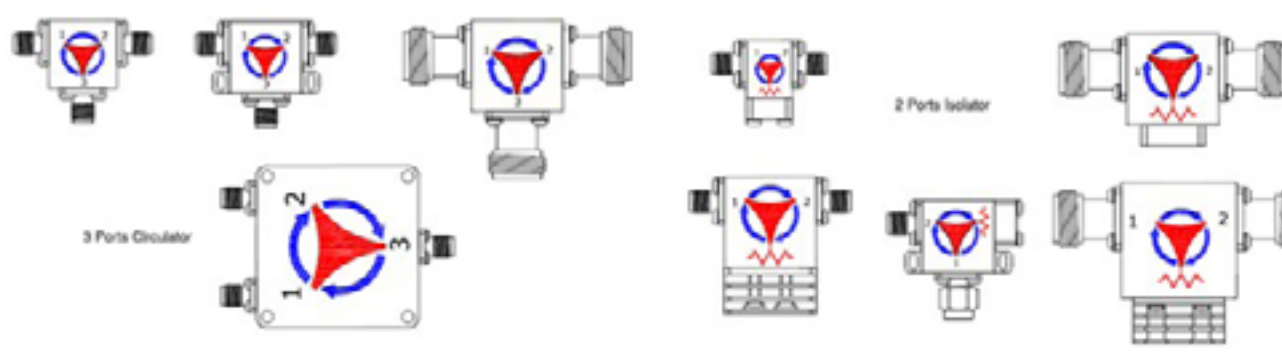Single Junction


MENLO MICRO

www.menlomicro.com

COMPANY OVERVIEW

The leading innovator in RF MEMS switch design and fabrication, Menlo Micro has lifted these limitations by developing unique materials, designs, and processing techniques to create the Ideal Switch. Menlo Micro’s Ideal Switch platform is a game-changer. It has the potential to serve multiple industries, including next generation 5G mobile networks, industrial IoT markets, battery management, homeautomation, electronic vehicles, and medical instrumentation.

Introducing the Ideal Switch

Technology platform with breakthrough innovations in materials and processing.

Ideal Switch

Unique Glass Packaging

- Better thermals & better power handling, improved RF performance

Highly Reliable

- >3B cycles spec, w/roadmap to >20B
- High power capability

Through-Glass-Via


- Lower parasitics , lower resistance, small size package, lowest cost

Simple & Scalable

- Simple design - lets us go very small (50 μ mx50 μ m unit cell)
- Small size - allows easy scaling for high power through massive switch arrays

Scalable & Versatile

- Small size - easy to scale costs down with production volume
- Standard Process Design Kit to create many products
- Short design cycles - faster time to market

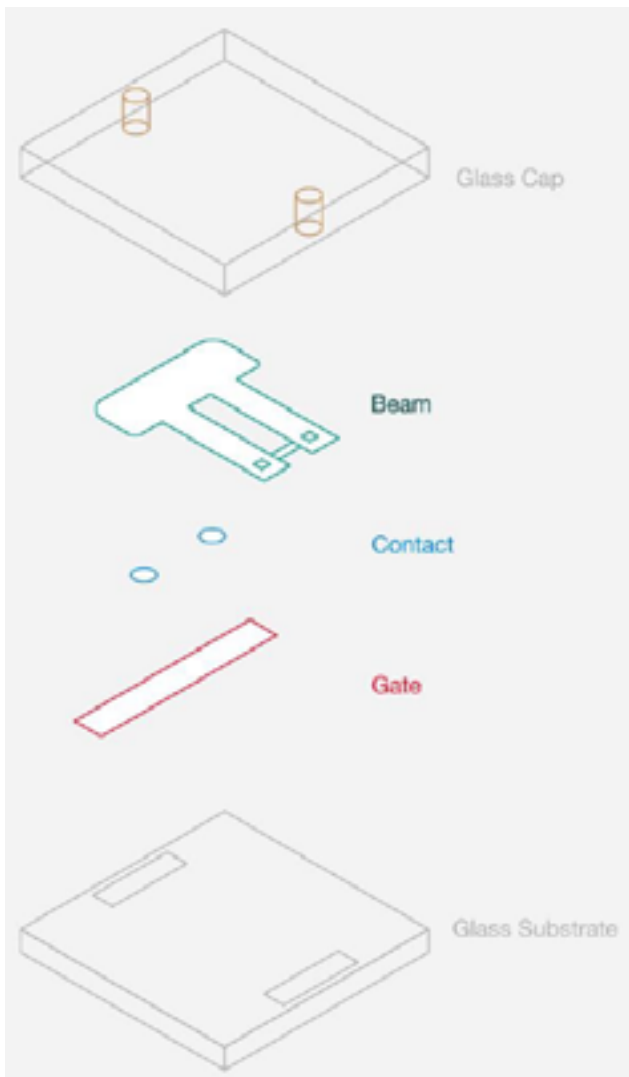

Beneath the Glass

Combining semiconductor manufacturing with a micro-mechanical actuator, the Ideal Switch air-gap achieves practically infinite isolation when OFF, and close to Zero Ω when ON. This combination creates the unique properties of the Ideal Switch:













Carries AC/DC and RF

Linear performance from DC to > 50 GHz

Switches at <10μs




Performs reliably >3 Billion times

Negligible resistance eliminates the need for bulky, heavy heatsinks

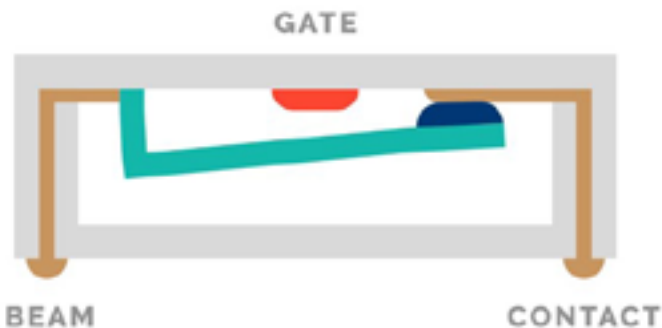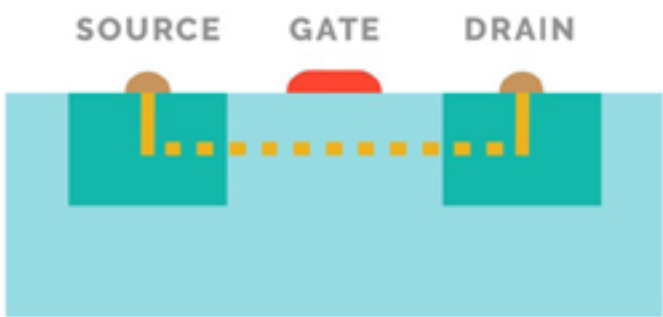

Superport Mode

- Bypass the RFC connection, connect any of the remaining 4 channels to any other channel
- Creates a SPST, SPDT, or SP3T with improved broadband performance out to 26GHz

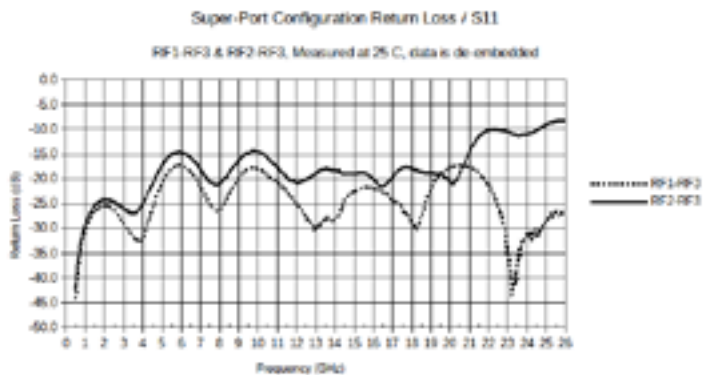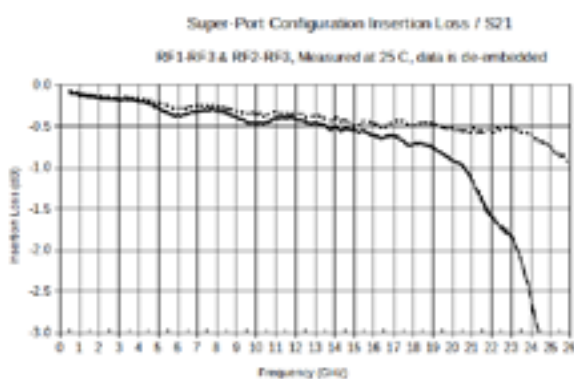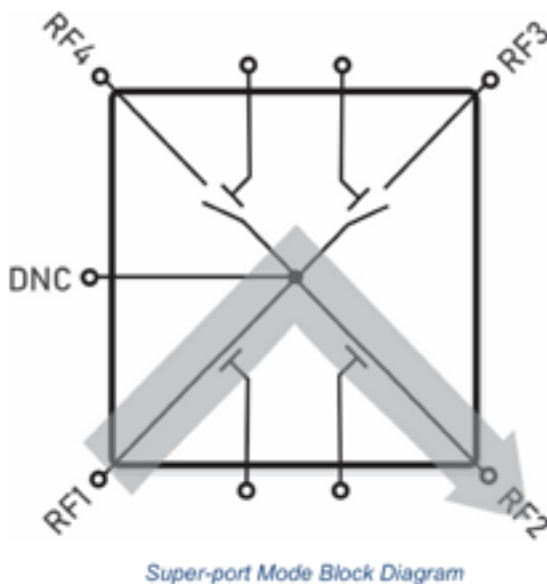

KONNECT RF


www.konnectrf.com

COMPANY OVERVIEW

Konnect RF can provide lower-cost alternatives for almost any part in the industry. Whether you need domestically manufactured mil-spec equivalents or you can use high-quality internationally produced parts, they can save you money and grow your bottom line.


- Founded 2010
- Located in Southeast Florida
- Over 600 customers Worldwide
- Supplying Coaxial Connectors, Adapters, Cable Assemblies and Passive Components
- Global Network of Contract Manufacturers
- All products inspected, packaged, and warehoused in USA
- Rapid and Cost Effective development of
- custom products

Connectors



Coaxial cable connectors, PC board receptacles, standard receptacles, field replaceable receptacles, cable terminations.

Adapters




In-Series, Between-Series

Cable Assemblies





RF & Microwave Components



Circulators & isolators, DC blocks, dust caps, power dividers, waveguide products, attenuators



COMPANY OVERVIEW

Wei Bo Associates HK, Ltd. is a privately held, Hong Kong registered company, founded in 2014.Offer cutting edge, world class RF & Microwave products from the comfortable confines of the world’s most customer friendly business environment.

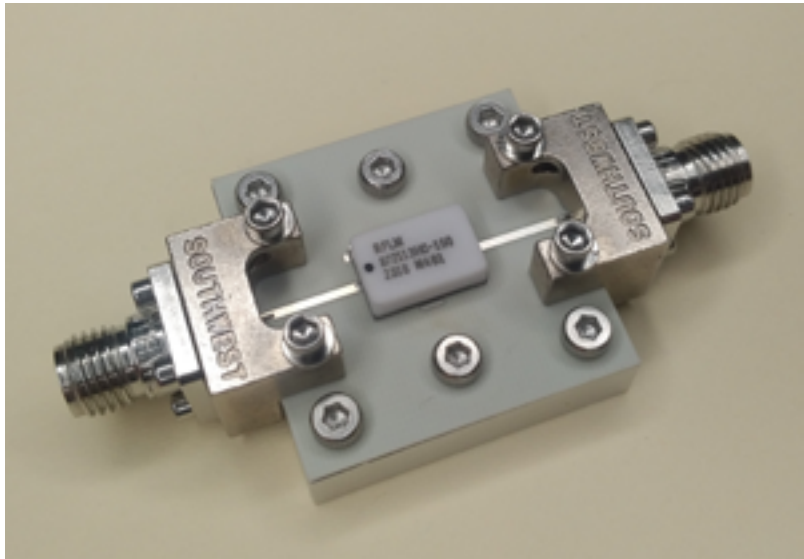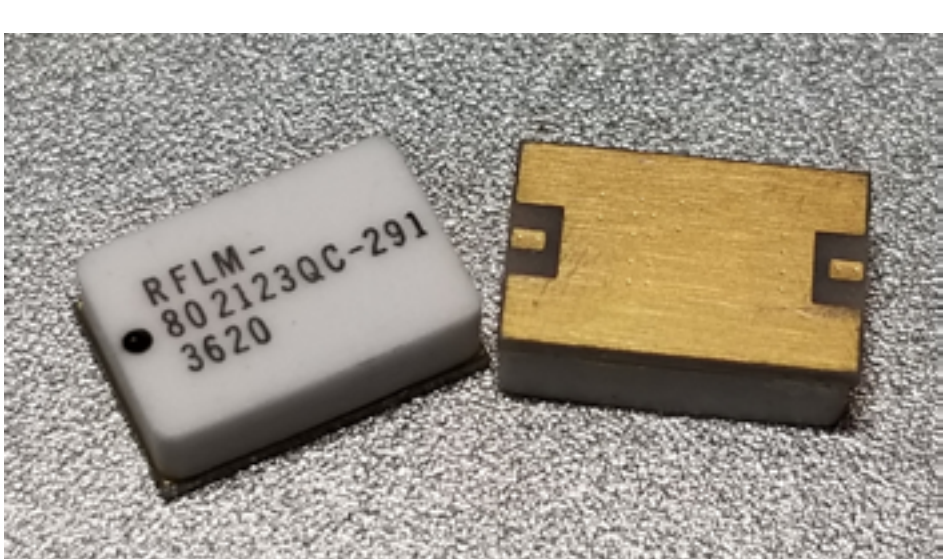

RF SWITCHES

Part Number	Freq Range (GHz)	Switch Topology	Tx Average Power (CW) (dBm)	Tx Peak Power (dBm)	Tx - Ant Insertion Loss (dB)	Return Loss (dB)	ISO (dB)	IP3 (dBm)
MSW2T-020522-232	0.02 - 0.52	SP2T, symmetrical	60	60	0.7	15	40	65
MSW2T-2000-199	0.05 - 1.0	SP2T, asymmetrical	50	50	0.15	23	52	65
MSW2T-2001-199	0.4 - 4.0	SP2T, asymmetrical	50	50	0.3	17	46	65
MSW2T-2002-199	2.0 - 6.0	SP2T, asymmetrical	50	50	0.6	13	34	65
MSW2T-2030-192	0.05 - 1.0	SP2T, symmetrical	50	57	0.3	22	52	65
MSW2T-2031-192	0.4 - 4.0	SP2T, symmetrical	50	57	0.5	15	35	65
MSW2T-2032-192	2.0 - 6.0	SP2T, symmetrical	50	57	0.6	13	35	65
MSW2T-2040-193	0.05 - 4.0	SP2T, symmetrical	52	57	0.5	20	42	65
MSW2T-2040X-198	0.1 - 2.0	SP2T, symmetrical	56	60	0.25	15	45	65
MSW2T-2041-193	0.4 - 4.0	SP2T, symmetrical	52	57	0.7	20	30	65
MSW2T-2050-194	0.05 - 1.0	SP2T, asymmetrical	52	58	0.15	20	50	65
MSW2T-2051-194	0.4 - 4.0	SP2T, asymmetrical	52	58	0.3	17	34	65
MSW2T-2060-195	0.02 - 1.2	SP2T, symmetrical	50	57	0.25	23	53	65
MSW2T-2061-195	0.02 - 2.0	SP2T, symmetrical	50	57	0.25	13	40	65
MSW2T-2062-195	1.5 - 6.5	SP2T, symmetrical	50	57	0.7	13	34	65
MSW2T-0025-195	1.0 - 2.0	SP2T, asymmetrical	50	57	0.3	15	20/15	65
MSW2T-2022-191	0.05 - 1.0	SP2T, asymmetrical	52	57	0.2	20	40/23	65
MSW2T-2735-196	2.7 - 3.5	SP2T, asymmetrical-CW	57	60	0.4	16	37	65
MSW2T-8512-740	8.5 - 12.0	SP2T, symmetrical	50	53	0.75	15	35	65
MSW3T-3100-209	0.05 - 1.0	SP3T, symmetrical	50	53	0.4	20	53	65
MSW3T-3101-209	0.2 - 4.0	SP3T, symmetrical	50	53	0.6	15	34	65
MSW3T-3200-150	0.05 - 3.0	SP3T, symmetrical	50	53	0.4	15	30	65
MSW3T-402103-332	0.4 - 1.0	SP3T, symmetrical	53	59	1.0	15	30	65
MSW5T-0310-505	0.03 - 1.0	SP5T, symmetrical	50	53	0.5	15	30	65
MSW6T-6000-600	0.03 - 0.5	SP6T, symmetrical	53	57	0.5	15	25	65
MSW6T-6100-600	0.002 - 0.03	SP6T, symmetrical	53	53	0.25	15	40	65
MSW6T-6040-600	0.03 - 0.5	SP6T, symmetrical	56	58	0.5	15	25	60

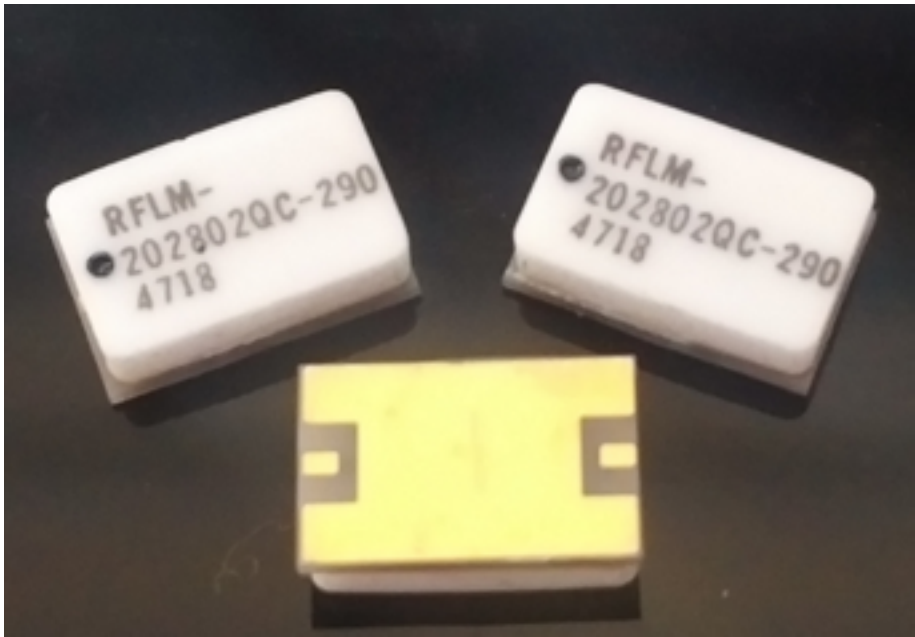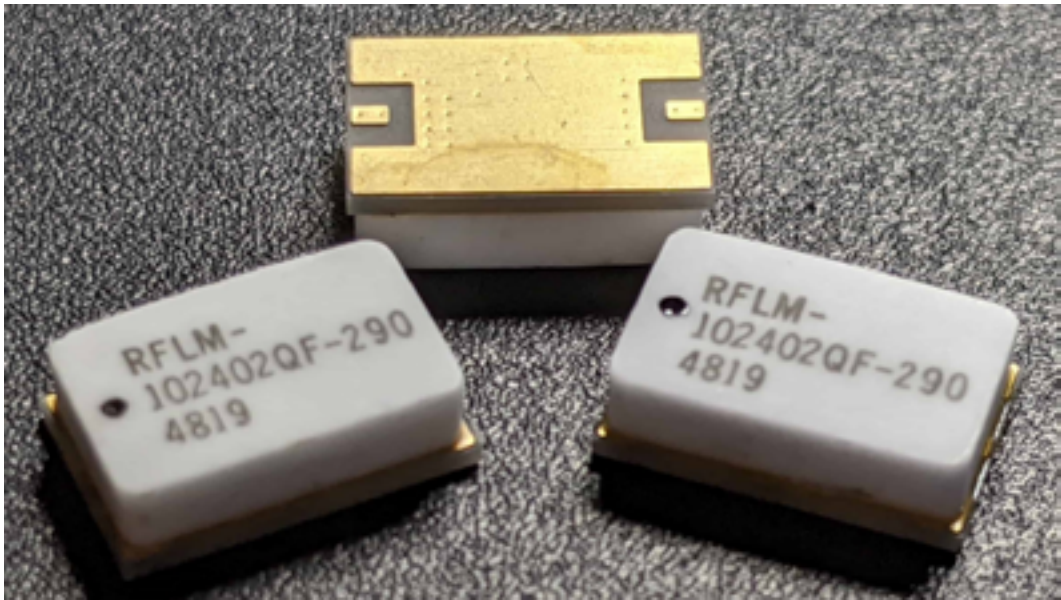

RF LIMETERS

Part Number	Limiter Description	Freq. (GHz)	Insertion Loss (dB)	Return Loss (dB)	CW Input Power (dBm)	Peak Input Power (dBm)	Flat Leakage Power (dBm)	Spike Leakage (ergs)	Recovery Time (nsec)
RFLM-200802MA-299	Passive, SMT	0.020 - 8.0	1.4	15	43	50	20	0.2	500
RFLM-300301QC-290	Quasi-Active, SMT	0.03 - 0.3	0.7	15	56	56	19	0.5	7,5
RFLM-300511QA-392	Quasi-Active, SMT	0.03 - 0.5	0.7	15	56	60	19	0.5	7
RFLM-301511QC-290	Quasi-Active, SMT	0.3 - 0.5	0.7	15	56	56	19	0.5	5
RFLM-301511QC-392	Quasi-Active, SMT	0.3 - 0.5	0.7	15	56	56	19	0.5	5
RFLM-401102QA-290	Quasi-Active, SMT	0.4 - 1.0	1.4	15	43	50	20	0.2	5
RFLM-401102QC-290	Quasi-Active	0.4 - 1.0	0.3	17	50	60	18	0.5	5
RFLM-501202LC-299	Passive, SMT	0.4 - 2.5	0.4	20	36	51	21	0.2	750
RFLM-501202MC-299	Passive, SMT	0.25 - 3.5	0.4	20	45	54	21	0.3	500
RFLM-052402QC-290	Quasi-Active, SMT	0.5 - 4.0	0.5	18	53	63	17	0.5	1,5
RFLM-961122MC-299	Passive, SMT	0.96 - 1.2	0.2	17	48	60	14	0.3	200
RFLM-961122XC-392	Quasi-Active, SMT	0.96 - 1.2	0.7	15	53	63	14	0.5	1
RFLM-011014QC-290	Quasi-Active, SMT	1.0 - 2.0	0.25	20	53	55	17	0.5	1,5
RFLM-102202HC-290	Quasi-Active, SMT	1.0 - 2.0	0.7	15	47	53	17	0.3	3
RFLM-102202QA-290	Quasi-Active, SMT	1.0 - 2.0	0.25	20	50	60	17	0.5	1,5
RFLM-102202XA-290	Quasi-Active, SMT	0.5 - 2.0	0.7	15	57	60	20	0.5	1
RFLM-011015QF-290	Quasi-Active, SMT	2.0 - 4.0	0.5	14	50	56	15	0.5	750
RFLM-102402QE-290	Quasi-Active, SMT	1.0 - 4.0	0.35	16	50	60	15	0.5	1
RFLM-102402QF-290	Quasi-Active, SMT	1.0 - 4.0	0.35	16	50	60	15	0.5	1
RFLM-252352QA-290	Quasi-Active, SMT	2.5 - 3.5	0.6	15	47	62	23	0.3	1,5
RFLM-262322HC-151	Quasi-Active, SMT	2.6 - 3.2	0.65	18	48	57	13	0.5	100
RFLM-202402QA-290	Quasi-Active, SMT	2.0 - 4.0	0.5	14	50	60	20	0.5	750
RFLM-202402QC-290	Quasi-Active, SMT	2.0 - 4.0	0.5	14	50	60	20	0.5	750
RFLM-202602HA-299	Passive, SMT	2.0 - 6.0	0.85	14	35	50	18	0.1	1
RFLM-202602HC-299	Passive, SMT	2.0 - 6.0	0.85	14	35	50	18	0.1	1
RFLM-502602HC-491	Passive, SMT	5.0 - 6.0	0.6	15	48	57	14	0.5	700
RFLM-202802LC-299	Passive, SMT	2.0 - 8.0	1.1	15	36	50	19	0.2	750
RFLM-202802MC-299	Passive, SMT	2.0 - 8.0	0.6	15	45	53	20	0.3	1,5
RFLM-202802QA-290	Quasi-Active, SMT	2.0 - 8.0	1.1	13	50	60	21	0.5	5
RFLM-202802QC-290	Quasi-Active, SMT	2.0 - 8.0	1.1	13	50	60	21	0.5	5
RFLM-872113HC-150	Passive, SMT	8.7 - 10.7	1.5	15	42	46	14	0.5	500
RFLM-802123QC-291	Passive, SMT	8.7 - 10.7	1.3	15	49	53	20	0.5	3
RFLM-143173HC-150	Passive, SMT	14.0 - 17.0	1.2	15	46	50	14	0.5	700

KONNECT RF


www.konnectrf.com

COMPANY OVERVIEW

Konnect RF can provide lower-cost alternatives for almost any part in the industry. Whether you need domestically manufactured mil-spec equivalents or you can use high-quality internationally produced parts, they can save you money and grow your bottom line.


- Founded 2010
- Located in Southeast Florida
- Over 600 customers Worldwide
- Supplying Coaxial Connectors, Adapters, Cable Assemblies and Passive Components
- Global Network of Contract Manufacturers
- All products inspected, packaged, and warehoused in USA
- Rapid and Cost Effective development of
- custom products

Connectors



Coaxial cable connectors, PC board receptacles, standard receptacles, field replaceable receptacles, cable terminations.

Adapters




In-Series, Between-Series

Cable Assemblies



RF & Microwave Components



Circulators & isolators, DC blocks, dust caps, power dividers, waveguide products, attenuators

ROSENBERGER

www.rosenberger.com

COMPANY OVERVIEW

For more than half a century, the name Rosenberger has been associated with the most advanced technology, quality and creativity. Rosenberger is a world-wide leading manufacturer of connector solutions in the high-frequency and fiber optic technology fields.



ESCC Space Qualified Products

Nearly all Rosenberger products can be qualified for space application (e.g. acc. to MIL-PRF-39012)

B2B and Board-to-Cable Connections

Rosenberger provides a wide range of RF coaxial connectors for PCB applications.

Features

- Small board-to-board distances
- Equalization of radial and axial misalignments
- Different holding forces
- Fast and cost-effective assembly design



Test & Measurement Portfolio



AeroSpace & Defense

Rosenberger is a qualified manufacturer according to

- DIN EN 9100
- ESCC
- MIL-PRF 39012

Portfolio

- Cable assemblies
- Board-to-board connections
- Board-to-cable connections



RF Coaxial Products

- The Rosenberger product range covers RF connectors, components and accessories and cable assemblies
- Portfolio – Standard Series
- SMP, Longwipe SMP, P-SMP, SMP Infinity, Mini-SMP, FMC, MCX, SMA, QMA, SMB, 1.0-2.3, 1.6-5.6, Inserts (Mini-Coax D-Sub), BNC, TNC, UHF, Mini-UHF, N, QN, SnapN, 7-16, 4.3-10, NEX10™)
- Surface mount connectors
- Reverse polarity connectors
- RF test switches
- Adaptors
- In-series adaptors
- Between-series adaptors
- Tools
- Crimping tools, crimp inserts
- Stripping tools



SMP Infinity

Mechanical specification


- ◆ Reliable connection, low insertion force ($\leq 45\text{N}$, like SMP limited detent)
- ◆ Locking sleeve: retention force up to 400 N
- ◆ One piece connector with pre-assembled inner conductor
- ◆ Not intermateable with SMP

Electrical specification

- ◆ Return loss $\geq 25\text{ dB}$ DC-30 GHz for cable HFE100D (tbc)
- ◆ Insertion loss typical $0,05 \times \sqrt{f(\text{GHz})}$ (tbc)
- ◆ RF leakage (-92dB @ 18 GHz) (tbc)

Planned variants

- ◆ Straight and right angle connectors
- ◆ Cable connectors for different cables
- ◆ PCB connectors (pin in paste, solder pin, SMD, rear mount)
- ◆ Bulkhead connectors

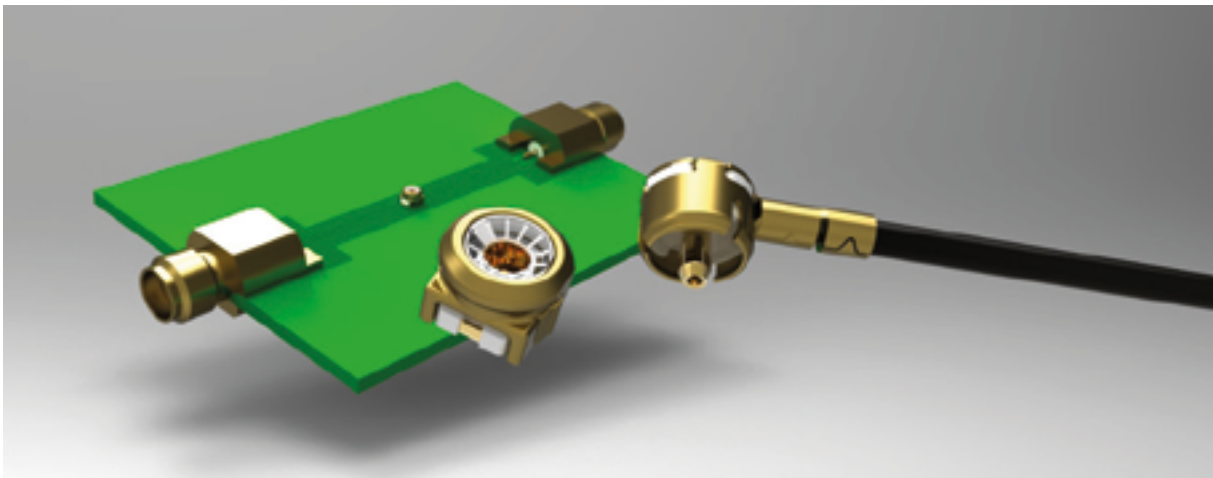

Micro RF

- ◆ Height 1,5 mm
- ◆ Space on PCB (1,8 x 1,9) mm
- ◆ Designed for DC to 6 GHz
- ◆ Impedance 50 Ω
- ◆ Height switch + cable connector < 2.7mm
- ◆ EMI Shielding: > 40 dB up to 3 GHz
> 35 dB up to 6 GHz
- ◆ Mating cycles > 10000

SMP

Frequency range	: - 40 GHz
Power handling	: 65W @ 2.2 GHz
Board to Board distance (min)	: 9.05 mm
Axial misalignment	: +/-0.3mm
Radial misalignment	: 4°
Disengagement forces	:
Full detent	: >22N
Limited Detent	: >9N
Smooth bore	: >2.2N

Rosenberger Non-Magnetic Products

- ◆ MRI (Magnetic Resonance Imaging) equipment
- ◆ The aerospace industry
- ◆ Industrial applications

Features

- ◆ Frequency range DC to 18 GHz
- ◆ Current rating typical 2 A
- ◆ Data rates up to 10 Gbps
- ◆ Tolerance compensation > 0.6 mm
- ◆ High number of mating cycles up to > 100,000



Long-Wipe SMP

Frequency range	: - 6 GHz
Power handling	: 100 W @ 2,2 GHz
Board to Board distance	: min. 9.35 mm
Axial misalignment	: +/-0.7mm
Radial misalignment	: 4°



P-SMP High Power


- ◆ Frequency range up to 10 GHZ
- ◆ Power handling up to 200W @ 2.2GHz
- ◆ Board to board distance min. 12.6 mm
- ◆ Axial misalignment +/-1mm
- ◆ Radial misalignment 4°
- ◆ Right angle connectors for cable application

PCB Connections

- ◆ Modular connector systems for DC frequencies up to 50 GHz
- ◆ Solderless PCB mount connectors for ultra-high frequency up to 110 GHz
- ◆ Spring-loaded coax systems (> 2,500 matings, pairwise phase matching 10 ps standard)

Applications

- ◆ High volume industrial production of high end PCB up to 50 GHz
- ◆ Applications with different interfaces on one board
- ◆ Applications with repair friendly products
- ◆ Applications where maintenance is important

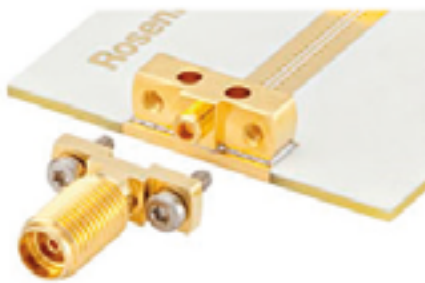

Modular Connector Systems



Spring-Loaded Coax



Solderless PCB Connectors




RF-PCB Connectors



SMP Non-Magnetic Connectors



QMA Non-Magnetic Connectors



Multi Channel Mini-Coax



Micro-RF Non-Magnetic Products

A1 MICROWAVE


www.a1microwave.com

COMPANY OVERVIEW


A1 Microwave was founded in 2001 in United Kingdom, and is a leading designer and manufacturer of passive RF and microwave components and sub-assemblies for satcoms, telecoms, defence, radar and scientific applications. Products and services are free from ITAR restrictions and many of our commercial off the shelf products (COTs) can be tailored to meet precise customer requirements.

The company acquired JMD Technologies in 2010 which had an established credibility in Precision Waveguide Component and Sub-Assembly production WG 6 (WR 650) to WG 22 (WR 28), and has been manufacturing since 1990. A1 Microwave also provides build to print of precision waveguide components and sub-assemblies from WG6 (WR650) to WG22 (WR28). A1 Microwave can supply specialist items to the Defence, Aerospace, Marine, Satellite Communications, Commercial and High Power segments of the markets.

TRANSMIT ARMS

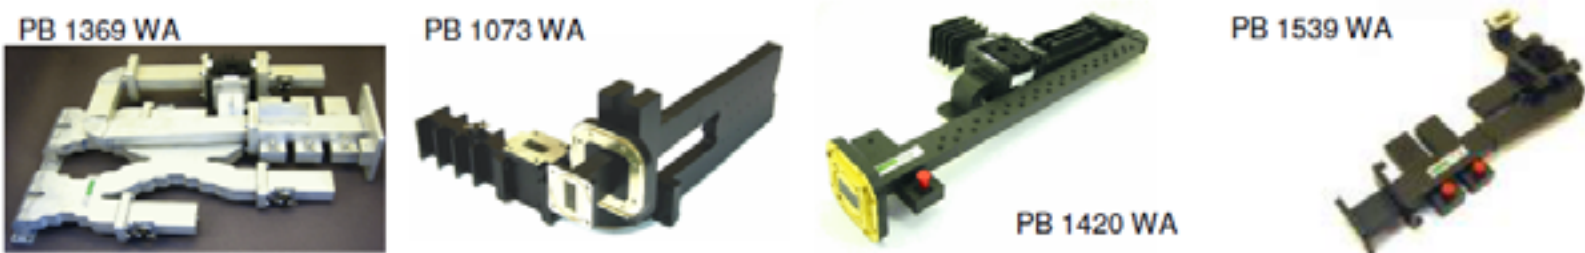


RECEIVE FILTERS

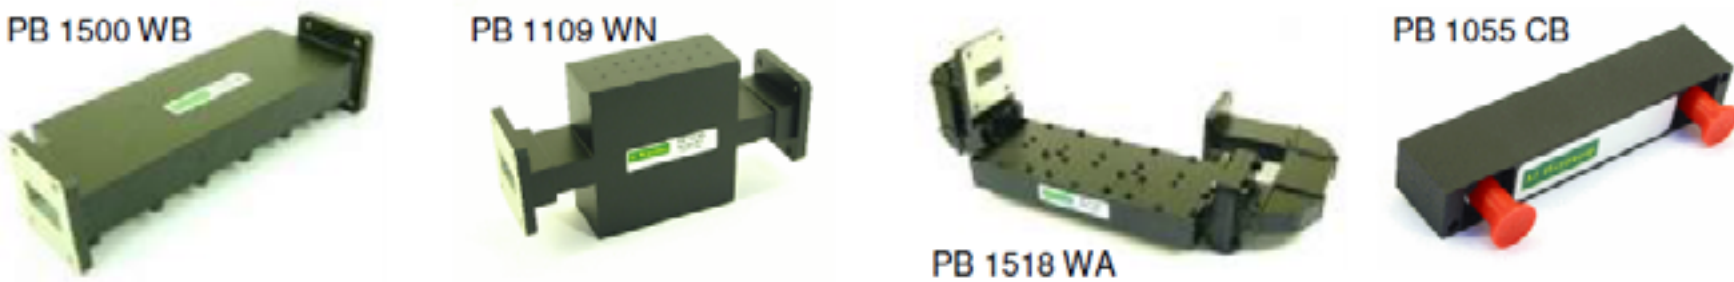

TRANSMIT FILTERS



DIPLEXERS

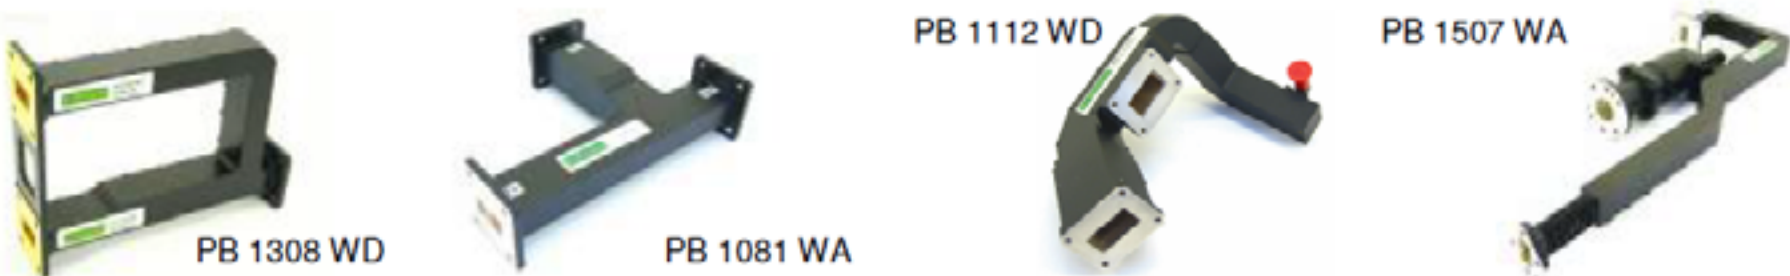

ANTENNA FEEDS



CIRCULATOR HOUSINGS




TERMINATION HOUSINGS



BENDS AND TWISTS



MAGIC TEES AND OMT'S

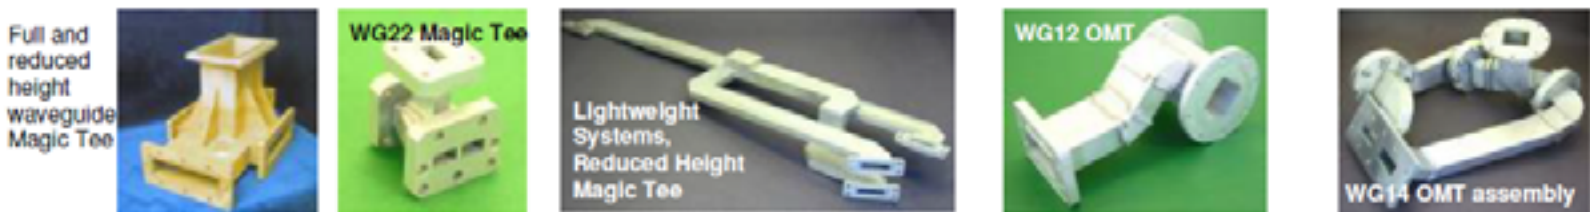

COMBINERS



GENERAL COMPONENTS



Since 2001 AI Microwave’s Filter division has brought high quality technically advanced microwave filtering products to the Satcom, Radar and Fixed Link communications markets.

Fast delivery and No NRE (on standard designs) is achieved by using sophisticated in-house design and simulation software, all new designs are “right first time” allowing the design to move from the design computer to the machine shop without the need for prototyping.

With in house CNC machining, turning, brazing, hard and soft soldering and bending facilities AI Microwave can design or build to print a complete range of custom waveguide components and assemblies.

INSULATED WIRE

www.iw-microwave.com

COMPANY OVERVIEW

Founded in 1970, IW developed a unique PTFE lamination process and applied it to manufacturing wire and cable. This process allowed IW to manufacture products of unprecedented reliability along with smaller diameters, from .050" to 0.500".

- Phase matching, amplitude matching, and time delay measurements up to 67 GHz are available when required.
- All assemblies are tested for VSWR and insertion loss before leaving the factory
- High Power cables:
2801 – up to 1.9KW (c.w) @ 2 GHz
4806 – up to 3.2KW (c.w) @ 1 GHz
customer proven to 15KW at 13.56MHz
7506 – theoretical 5KW (c.w) @ 1 GHz
- 75ohm cables: 2801/75, 1801/75, 1151/75
- Low loss phase stable dielectric: 1571 cable 64dB/100ft. @ 40 GHz – 4dB/100ft. less than Micro Coax


115	GPO/GPPO, 1.85mm (V™), 2.4mm, 2.92mm (K™)
125	GPO/GPPO, 1.85mm (V™)
140	2.4mm
150	SMA, TNCA, N, 3.5, 2.4, 2.92mm (K™)
160	N, SMA, TNCA, SMP, K™
170	2.92mm (K™)
180	N, SMA, TNCA, 3.5mm, 2.92mm (K™)
230	N, SMA, TNCA, SC, 3.5mm
280	N, SMA, TNCA, SC
480	N, 7/16, SC&C
RF047	SMA, 2.92mm (K™), 2.4mm, 1.85mm (V™), GPO/GPPO
RF085	Industry Standard 085 SR Connectors
RF141	Industry Standard 141 SR Connectors
RF250	SMA, TNC, N, SC

*Connector types listed are preferred matching for referenced cables. Additional connector types can be provided. Please consult factory.



CABLE ASSEMBLIES

METRIC PART NUMBER

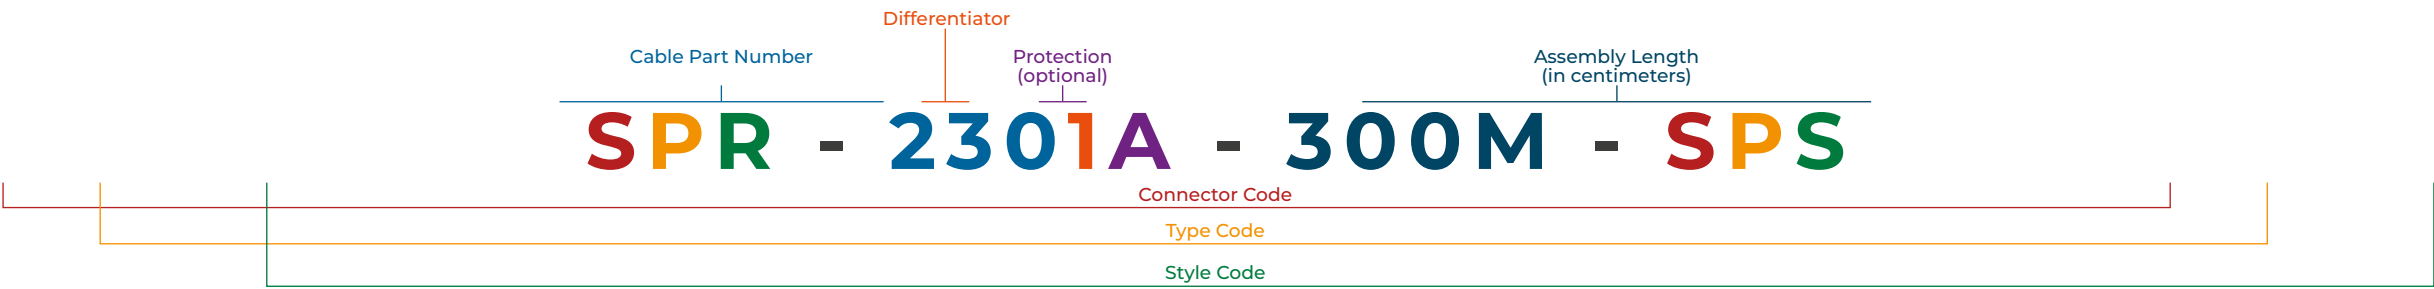

Note: Metric part number format is XXX meters - 300M defines a 3m length assembly; a 10m assembly part number with the same connectors as shown above is SPR-2301A-1000M-SPS

● Custom Solutions

In addition to our internally ruggedized cables, IW has a wide range of materials and processes designed to protect the integrity of our cable assemblies. These include a variety of metallic and non-metallic external sheaths to address your specific application. Please contact us for details.

1	ZEL	Tefzel Jacket
2	LC	Low Smoke/ Zero Halogen Polyurethane
3	NX	Fire resistant NOMEX* braid *Nomex is a registered trademark of the DuPont Corporation
4	A	Interlocked stainless steel armor, crush resistant up to 400 lbs per linear inch
5	N	Neoprene weather proof jacket
6	ALC	Armor with extruded Polyurethane jacket

● Re-Flex

To provide improved electrical and mechanical performance over traditional hand-formable designs, Insulated Wire presents **Re-Flex™**.

Both RF085 and RF141 are industry standard line sizes, consequently a wide range of connector types and styles can be used with these cables, including: SMA, TNC, N, GPO™, GPPO™, **2.92mm/K™, 2.4mm and 1.85mm/V™**, with performance up to 60GHz. **RF250** is commonly used for higher power applications with SMA, TNC, N, SC and HN connectors available.

Cable part numbers are TPRFEP085, TPRFEP141 and TPRFEP250.



CABLE TYPE	MAXIMUM FREQUENCY (CABLE ONLY)	ATTENUATION (DB/FT., MAX)				BEND RADIUS (INCH)	REPLACES
		10 GHZ	18 GHZ	32 GHZ	60 GHZ		
RF085	62 GHz	0.60	0.91	1.28	2.01	0.125	RG405
RF141	32 GHz	0.41	0.60	0.88	-	0.250	RG402
RF250	19.5 GHz	0.29	0.44	-	-	0.375	RG401



www.sacaeurope.com

info@sacaeurope.com

The Netherlands

Steenowenweg 5, 5708HN, Helmond

+31 492 218 972

Poland

Wspólna 70, Mazowieckie 00-687, Warsaw

+48 221 822 534